



Winnie Industries

MANUFACTURER OF FASTENING SUPPORTS

Magnetic

Ultra Heavy-Duty Mounting Magnet with Stainless Steel Bridle Ring

Extremely strong, corrosion resistant cable management solution for harsh environments that securely adheres to THIN metal



**HARSH
ENVIRONMENT
PRODUCTS**

Features:

- Permanent nine-pole charged rare earth neodymium magnet
- Exceptionally strong when compared to conventional neodymium pot magnets
- Vertical pull force up to 150 lb on sheet metal
- Due to the intense magnetic attraction at the surface, will not easily slide like other magnets
- Magnet's black epoxy coating provides corrosion resistance
- Crafted from heavy-duty, zinc plated steel which allows for great durability & corrosion resistance
- Designed with open loop for quick & easy cable installation
- Provides support for CAT5e/CAT6 category cable, low-voltage wire, coax, signal & control cable and electrical wire up to 600V
- Quick & easy installation without specialized tools and equipment
- Sticks through oil, grease and dirty areas
- Long-lasting performance in a variety of demanding indoor & outdoor conditions

Application:

- Provides support in the distribution of wire & cable bundles
 - Network/Data
 - Telecom/Voice
 - Broadband, Satellite, CCTV
 - Low Voltage/Security/Fire Alarm
 - Signal/Control Cable
 - Electrical Wire

Installation:

- Secures to steel beams, ceiling decks, sheet metal, metal joists, van walls & other ferromagnetic surfaces
- **Engineered for max attachment to thin metal**



engineered and manufactured to make installs easier

winnieindustries.com



5420 Newport Dr. Unit 62
Rolling Meadows, IL 60008

224-993-0011
sales@winnieindustries.com



Winnie Industries


MANUFACTURER OF FASTENING SUPPORTS

Magnetic

Part Numbers

Part #	Description	Box Qty	12-digit UPC
WUMAG-WBR4T125SS	1.25" Bridle Ring, 1.5" Stem, 150 lb Magnet, UHD	10	811443030918

- | Reduces job labor costs on permanent or temporary installations |
- | Suitable for all indoor and outdoor holding and fastening applications |
- | Engineered to hold to ferromagnetic surfaces thinner than 1mm |
- | Magnet's epoxy coating provides outstanding chemical resistance, durability, and toughness |
- | Fast and cost-effective solution to support voice, security, and video cable |
- | If using a bridle ring with high performance data cable a saddle is required to ensure proper bend |
- | Non-continuous supports may not exceed spacing of 5' per TIA 569-C.9.7 |

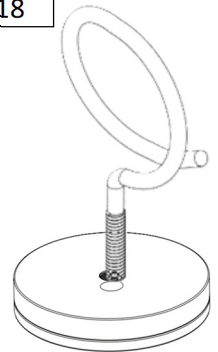

Related Items

Part #	Description
WUMAG-1420UHD	150 Lb Ultra Heavy-Duty Mounting Magnet, UHD
WBR4T125SS	1 1/4" Bridle Ring, 1/4-20 Thread, 316 Stainless Steel
WBR4T200SS	2" Bridle Ring, 1/4-20 Thread, 316 Stainless Steel
WBR4T400SS	4" Bridle Ring, 1/4-20 Thread, 316 Stainless Steel
WJH32SS	2" J Hook, 316 Stainless Steel



**HARSH
ENVIRONMENT
PRODUCTS**

Uses

Applications	
Food processing & storage	Marine, boats, docks & offshore structures
Healthcare & pharmaceutical	Chemical plants and refineries
Laboratories	Breweries & distilleries
Industrial factories that handle corrosives	Environment with high salt levels



Nothing else on the Market Compares

Magnet Specifications:

Specify Winnie...

- ✓ Since 2015
- ✓ Family-Owned & Operated
- ✓ Personal & Friendly Customer Service



- Size: 2" x 3/8" (50.8mm x 9.5mm)
- Threaded Hole: 1/4 x 20
- Vertical Pull Force: 150 lb
- Coating: Epoxy
- Material: Magnet: Neodymium (NdFeB)
Fender Washer: Steel
- Temperature Tolerance: -40°F - 176°F (-40°C - 80°C)

- + Please handle neodymium magnets with care
- + Keep neodymium magnets away from anyone with a pacemaker
- + Magnets are not toys and should be kept away from children and pets
- + Large powerful magnets can pinch your fingers or cause other injuries, use caution

Consult & follow local codes and practices

© Winnie Industries, LLC. All Rights Reserved. Drawings are proprietary and may not be copied or used without express written permission.

Rev 202403

engineered and manufactured to make installs easier

winnieindustries.com



5420 Newport Dr. Unit 62
Rolling Meadows, IL 60008

224-993-0011
sales@winnieindustries.com